

# EC5 Series



## Economy Channel One Tube



**Application:** This cost effective strip light is ideal for use in all residential, commercial and industrial areas where general lighting is desired.



**Construction:** This unit is designed from heavy gauge die formed steel and is finished in baked white enamel or polyester powder coating for maximum durability and reflectivity. End plate doubles as coupler when fixture is used in continuous run. Symmetric and asymmetric reflectors are available.

**Electrical:** All units are furnished with UL Listed Class P thermally protected ballast. Other voltages are available upon request. Fixtures meet requirements for UL Luminaire Standard # 1598. All units comply with National Energy Standards.

**Mounting:** Unit is equipped with knockouts and holes for pendant or surface mounting. This fixture can be mounted individually or in continuous run. 7/8" knock out is provided in end plate for conduit connector.

Coefficients Utilization Zonal Cavity Method

RF	20											
	80%				70%				50%			
RC	70	50	30	10	70	50	30	10	50	30	10	10
0	105	105	105	105	99	99	99	99	89	89	89	
1	92	87	82	77	87	82	78	74	74	70	67	
2	83	74	66	60	78	70	63	58	62	57	53	
3	75	64	56	49	70	61	53	47	54	48	43	
4	68	56	47	41	64	53	45	39	48	41	36	
5	62	49	40	33	58	46	38	32	42	35	30	
6	56	43	35	28	53	41	33	27	37	30	25	
7	52	39	30	24	49	37	29	23	33	26	21	
8	48	35	26	21	45	33	25	20	30	23	18	
9	44	31	23	18	41	30	22	17	27	20	16	
10	41	28	21	16	39	27	20	15	24	18	14	

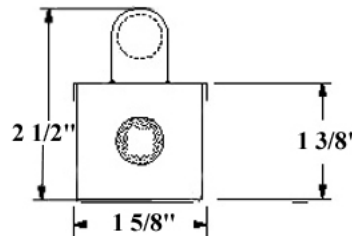

Fixture Length

T8	Length	T5	T5HO	Length
F17T8	24"	F14T5	F24T5HO	22"
F25T8	36"	F21T5	F39T5HO	34"
F32T8	48"	F28T5	F54T5HO	46"
F40T8	60"	F35T5	F80T5HO	58"

Maximum Weight = 8 lbs. / 48"

### Ordering Information

Specifications Subject To Change Without Notice

Model	# Lamps	Lamp Type	Ballast	Voltage	Options	Cord
<b>EC5-</b>	<b>1</b>	<b>32</b>	<b>E</b>			
<b>EC5</b>	1 = One <b>Tandem</b> 21 = Single Row	<b>T5 Lamps</b> 14T5 = F14T5 21T5 = F21T5 28T5 = F28T5 35T5 = F35T5 <b>T5 High Output</b> 24T5HO = F24T5HO 39T5HO = F39T5HO 54T5HO = F54T5HO 80T5HO = F80T5HO <b>T8 Lamps</b> 17 = F17T8 25 = F25T8 32 = F32T8 40+T8 = F40T8	E = Electronic .88BF	Blank = 120V 277 = 277 V MV= Multi Volt	<b>O</b> = Grounded Outlet <b>TOG</b> = Toggle Switch <b>ROC</b> = Rocker Switch <b>PULL</b> = Pull Switch <b>SYM</b> = Symmetrical Reflector <b>ASY</b> = Asymmetrical Reflector <b>REF</b> = Specular Reflector	<b>CP-XE</b> = Exit End <b>CP-XS</b> = Exit Side <b>CP-XB</b> = Exit Base <i>Specify Cord Length</i>

K-B Lighting Mfg. Co., Inc. 2101 Byberry Road, Philadelphia, PA 19116  
(215) 673-6400 phone (215) 673-6431 fax [sales@kblighting.com](mailto:sales@kblighting.com) email