



BUT Series


Covered Circline Fixtures

Application: This economical surface mounted Circline unit is available in a white finish. This unit is for use in commercial and residential areas such as restrooms, closets, hallways, storage areas or any small room area where general lighting is desired.

Construction: This unit is designed from heavy gauge die formed steel and is finished in baked white enamel or polyester powder coating for maximum durability and reflectivity. Pressurized bulb clips ensure centering and bulb support of Circline bulbs.


Electrical: All units are furnished with UL Listed Class P thermally protected ballast. Other voltages are available upon request. Fixtures meet requirements for UL Luminaire Standard # 1598. All units comply with National Energy Standards.

Mounting: Units are equipped with knockouts for junction box or direct surface mounting.

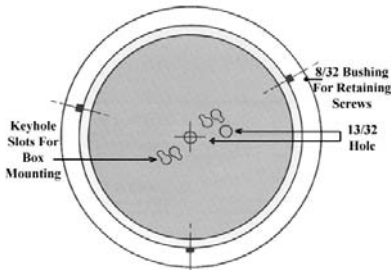

Fixture Diameter

Bulb	A	B
BUT-22	10 1/8"	11"
BUT-32	12 3/4"	14"
BUT-54	12 3/4"	14"
BUT-40	17"	19"
BUT-72	17"	19"

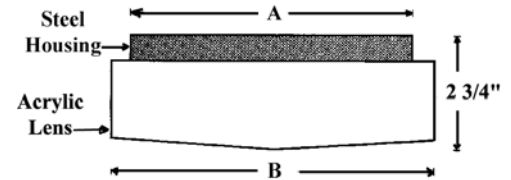

Maximum Weight = 4 lbs. / 11" 9 lbs. / 14"

Ordering Information

Specifications Subject To Change Without Notice

Model	Lamp Type				Voltage
BUT-	22				
BUT	CIRCLINE LAMPS	COMPACT FLUORESCENT (11")		COMPACT FLUORESCENT (14")	
		Single Tube	Double Tube	Double Tube	Triple Tube
	22 = (1) FC8T9 32 = (1) FC12T9 40 = (1) FC16T9 54 = (1) FC8T9 & (1) FC12T9 72 = (1) FC12T9 & (1) FC16T9	22/1-7 7 watt 22/1-9 9 watt 22/1-13 13 watt	22/2-7 7 watt 22/2-9 9 watt 22/2-13 13 watt	32/2-7 7 watt 32/2-9 9 watt 32/2-13 13 watt	32/3-7 7 watt 32/3-9 9 watt 32/3-13 13 watt

K-B Lighting Mfg. Co., Inc. 2101 Byberry Road, Philadelphia, PA 19116
 (215) 673-6400 phone (215) 673-6431 fax sales@kblighting.com email