



# 318 Series


## Undercabinet Unit

**Application:** This undercabinet fixture is designed for use in areas with low clearance and where high light levels are desired. It is ideal for use in kitchens, hospitals, desk areas, and bathrooms.


**Construction:** Housing is designed from heavy gauge die formed steel and finished in a baked white enamel or polyester powder coating for maximum reflectivity and durability. Lens is extruded white acrylic that snaps on and off for easy relamping.

**Electrical:** All units are furnished with UL Listed Class P thermally protected ballast. Other voltages are available upon request. Fixtures meet requirements for UL Luminaire Standard # 1598. All units comply with National Energy Standards.

**Mounting:** Every fixture is supplied with keyhole slots for easy surface mounting without entering ballast raceway. 1/2" knockouts provided in ends and bottom for supply connection.

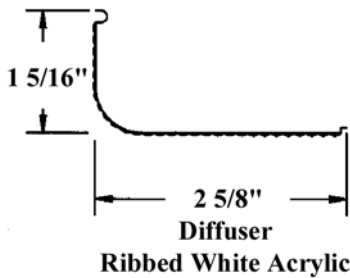

Fixture Length	
T8	Length
F17T8	24 1/16"
F25T8	36 1/16"
F32T8	48 1/16"

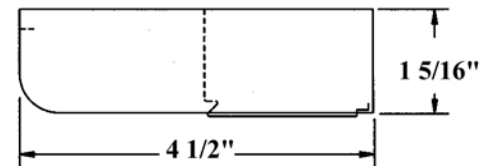

Maximum Weight = 6 lbs. / 48"

### Ordering Information

Specifications Subject To Change Without Notice

Model	# Lamps	Lamp Type	Ballast	Voltage	Options	Cord
<b>318 -</b>	<b>1</b>	<b>32</b>	<b>E</b>			
<b>318</b>	1 = One Single Row 21 = Two Tube	<u>T8 Lamps</u> 17 = F17T8 25 = F25T8 32 = F32T8	M = Magnetic E = Electronic .88 BF	Blank = 120V 277 = 277 V	O = Grounded Outlet TOG = Toggle Switch ROC = Rocker Switch PULL = Pull Switch	CP-XE=Exit End CP-XS=Exit Side CP-XB=Exit Base Specify Cord Length

K-B Lighting Mfg. Co., Inc. 2101 Byberry Road, Philadelphia, PA 19116  
 (215) 673-6400 phone (215) 673-6431 fax [sales@kblighting.com](mailto:sales@kblighting.com) email