



WPM -WPL Series

Medium and Large Wall Pack

Application:

- Warehouses
- Tunnels
- Loading Docks
- Parking Garages
- Apartment Buildings
- Shopping Centers
- Factory Entrances
- Hospitals

Construction: Two Piece, die cast aluminum housing. Front and back secured together by two hinges and two screws. 1/2" tapped holes are supplied for securing connections and photocell. The Diffuser is .083 thick glass or injection molded high impact polycarbonate with interior and exterior prismatic surfaces which allows for minimum glare and maximum light distribution. Diffuser secured to housing by steel clips with continuous line of silicon gasket. The reflector is .063" thick aluminum. Secures to housing by means of screws.


Electrical: UL Listed for wet and damp Locations

Mounting: Wall mount for indoor and outdoor use.



Fixture	A	B	C
WPM	7 1/4"	14 1/4"	9"
WPL	9 3/8"	18 1/8"	9"
WPLD	13"	18 1/8"	9"

Fixture Size

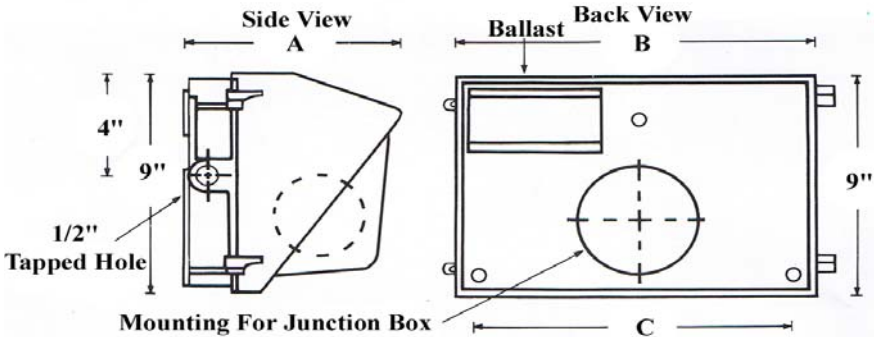

Ordering Information

Specifications Subject To Change Without Notice

Model	Lamps	Lamp Type		Voltage	Options
WPM	1	35-HPS			
WPM = Up To 150W HPS Up To 175W MH WPL = Up To 250W HPS Up To 250W MH WPLD = Up To 1000W HPS Up To 1000W MH	1 = One	<u>High Pressure Sodium</u> 35-HPS = 35W 50-HPS = 50W 70-HPS = 70W 100-HPS = 100W 150-HPS = 150 W 200-HPS = 200W 250-HPS = 250W 400-HPS = 400W 1000-HPS = 1000W	<u>Metal Halide</u> 100MH = 100W 175MH = 175W 250MH = 250 W 400 MH = 400W 1000MH = 1000W	Blank = 120/277V	CELL = Photocell 480V = 480 Volt Ballast WG = Stainless Steel Wire Guard

K-B Lighting Mfg. Co., Inc. 2101 Byberry Road, Philadelphia, PA 19116
(215) 673-6400 phone (215) 673-6431 fax sales@kblighting.com email