

# SQ Series

## Square Surface Mounted H.I.D.




### Application:

- Correctional Facilities
- Recreation Areas
- Institutions
- Public Areas
- Schools
- Hotels
- Shopping Centers
- Terminals

**Construction:** Die cast heavy gauge aluminum. Five stage powder coated finish. A neoprene gasket eliminates moisture, dust, and insects. Standard or tamper resistant spanner head. The diffuser is a multi patterned injection molded clear prismatic polycarbonate with UV inhibitors to minimize discoloration. Can also be supplied in white prismatic. Drill points for maximum security installations.

**Electrical:** Meets all UL Requirements for wet locations for ceiling mount and damp locations for walls.

**Mounting:** Wall or ceiling mount for indoor or outdoor application

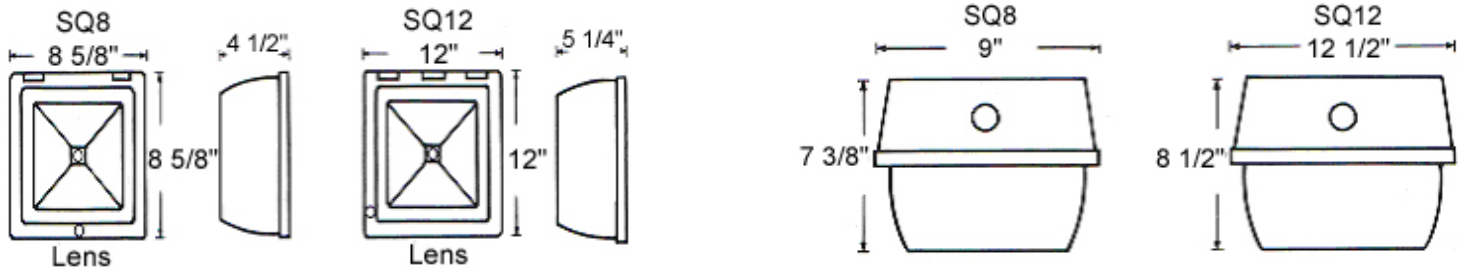

### Ordering Information

Specifications Subject To Change Without Notice

Model	# Lamps	Lamp Type		Voltage
<b>SQ-8</b>	<b>1</b>	<b>35-HPS</b>		
SQ-8 = 8" Square Up To 70W HPS Up To 100W MH  SQ-12 = 12" Square Up To 150W HPS Up To 175W MH	1 = One	<u>High Pressure Sodium</u> 35-HPS = 35W 50-HPS = 50W 70-HPS = 70W 100-HPS = 100W 150-HPS = 150 W	<u>Metal Halide</u> 100MH = 100W 175MH = 175W	Blank = 120V DT = 120/277V Multi = Quad HPF = NPF To HPF Capacitor 120V 480V = Multitap To 480 Volt

K-B Lighting Mfg. Co., Inc. 2101 Byberry Road, Philadelphia, PA 19116  
 (215) 673-6400 phone (215) 673-6431 fax [sales@kblighting.com](mailto:sales@kblighting.com) email