

320 Series

1" Deep Undercabinet Unit




Application: The shallowest of all fixtures, this unique 1" deep unit is specially designed for T-5 tubes to be mounted under cabinet with flat, non recessed base. 320 series fixtures are ideal for use in kitchens, hospitals, desk areas, and bathrooms.

Construction: Housing is designed from heavy gauge die formed steel and finished in a baked white enamel or polyester powder coating for maximum reflectivity and durability. Lens is extruded white acrylic that snaps on and off for easy relamping.


Electrical: All units are furnished with UL Listed Class P thermally protected ballast. Other voltages are available upon request. Fixtures meet requirements for UL Luminaire Standard # 1598. All units comply with National Energy Standards.

Mounting: Every fixture is supplied with keyhole slots for easy surface mounting without entering ballast raceway. 1/2" knockouts provided in ends and bottom for supply connection.

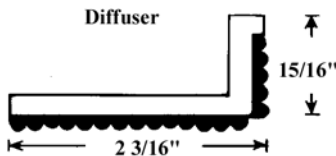

Fixture Length	
T5	Length
F8T5	12"
F13T5	21"
F14T5	23"
F21T5	35"
F28T5	47"

For Tandem Units:
Multiply lamp length above by 2

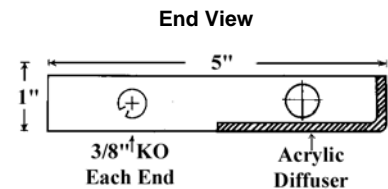

Maximum Weight = 6 lbs. / 21"

Ordering Information

Specifications Subject To Change Without Notice

Model	# Lamps	Lamp Type	Ballast	Voltage	Options	Cord
320-						
320	1 = One Single Tandem 2 = Two Tube	<u>T5 lamps</u> 08 = F8T5 13 = F13T5 14T5 = F14T5 21T5 = F21T5 28T5 = F28T5	M = Magnetic E = Electronic .88 BF	Blank = 120V 277 = 277 V	O = Grounded Outlet TOG = Toggle Switch ROC = Rocker Switch PULL = Pull Switch	CP-XE=Exit End CP-XS=Exit Side CP-XB=Exit Base Specify Cord Length

K-B Lighting Mfg. Co., Inc. 2101 Byberry Road, Philadelphia, PA 19116
(215) 673-6400 phone (215) 673-6431 fax sales@kblighting.com email